

Operation Instructions for HYBRID Restraints

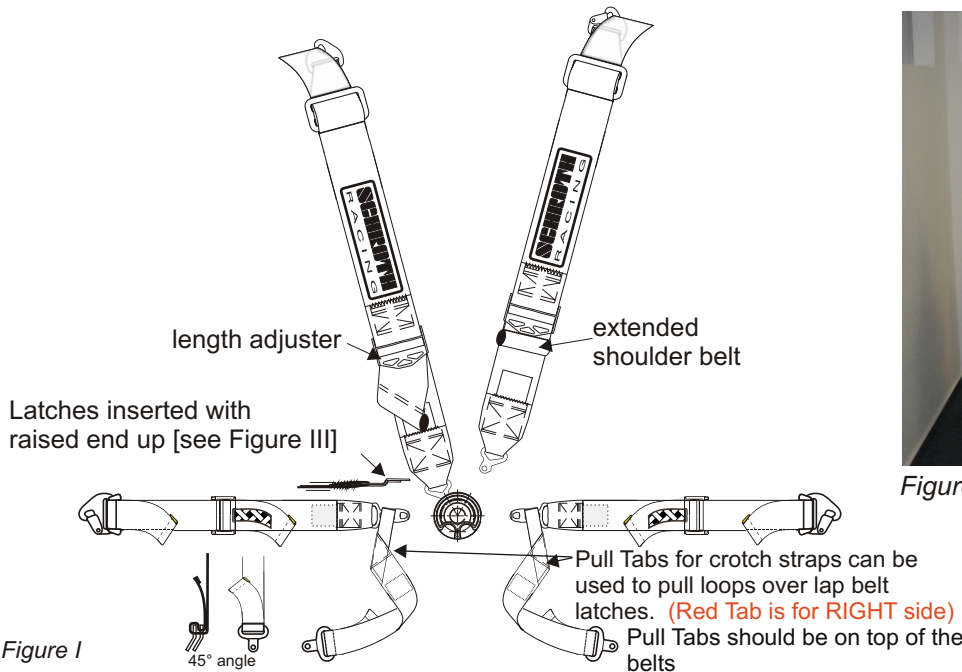


Figure I



Figure II

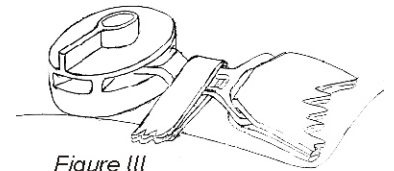


Figure III

Extend both shoulder belts by lifting up on the Length Adjuster and pulling up.
Extend the lap belts:

Lap belts can be extended by lifting up on the Length Adjuster and pulling away from the centre of your lap
Fixed belts (without adjusters) must be pre-installed to fit tight within the crest of the pelvic bone.

Attach the crotch straps and lap belts:

Slide the left side crotch strap loop over the left side lap belt latch and click it into the Cam Lock (Rotary Buckle) on the left side. (Note: Pull Tabs should be facing up with **RED Tab on RIGHT side of belt.**)

Slide the right side crotch strap loop over the right side lap belt latch and click it into the Cam Lock on the right side.

NOTE: When inserting the lap belt latch into the Cam Lock be sure that the raised end of the latch is facing away from the body as shown in Figure III.

NOTE: Pre-adjusted crotch strap length should position buckle as shown in Figure IV.

Attach the second shoulder strap to the Cam Lock.

Tighten lap belt as tight as possible (if an adjuster is available) before tightening shoulder belts. Be sure that the Cam Lock is centred.

Tighten shoulder belts (Figure V). Make sure strap tightening results in a Cam Lock and lap belt position as shown in Figure VI. If position is not as shown in Figure VI, extend the shoulder belts and re-do lap and crotch strap adjustments to achieve the proper belt geometry.



Figure IV



Figure V



Figure VI

990143